


## INSTRUCTION MANUAL FOR SINGLE ACTION POLISHERS


### Operation Procedures

1. Connect the coupler to the air inlet ❶.


2. Fix the spindle nut ❷ with the spanner wrench, and secure to mount the special pad thereto.




3. Pour approx. 0.5cc (2 to 3 drops) of the oil through the coupler. Connect it to the air hose, and run for 3 to 5 seconds to circulate the oil.



4. Speed can be adjusted by the air regulator ❸.

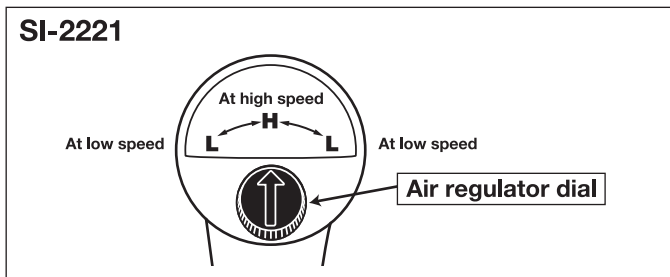




Adjust the arrow of the air regulator dial to the "H" (high speed) or the "L" (low speed).

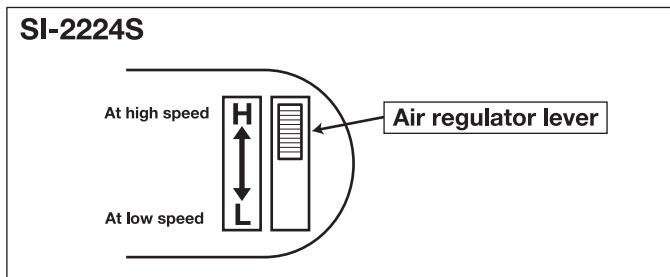

Adjust the air regulator lever to the "H" (high speed) or the "L" (low speed).


In addition, do fine adjustment by pull variation of the throttle lever and trigger ❹.

5. For the polishing work, attach a sponge buff or a wool buff to the pad ❺. For the sanding work, attach paper adjusting it to the center.

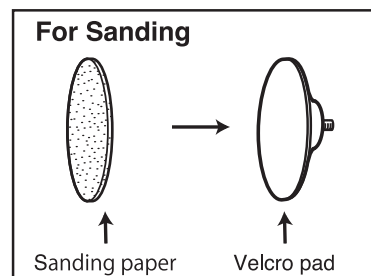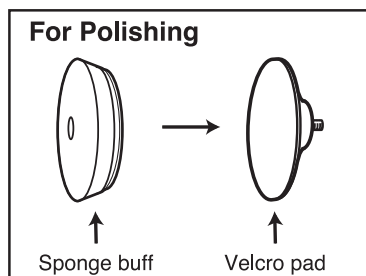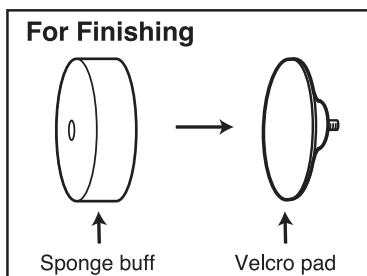

SI-2221


Max. rpm : 4,500 rpm

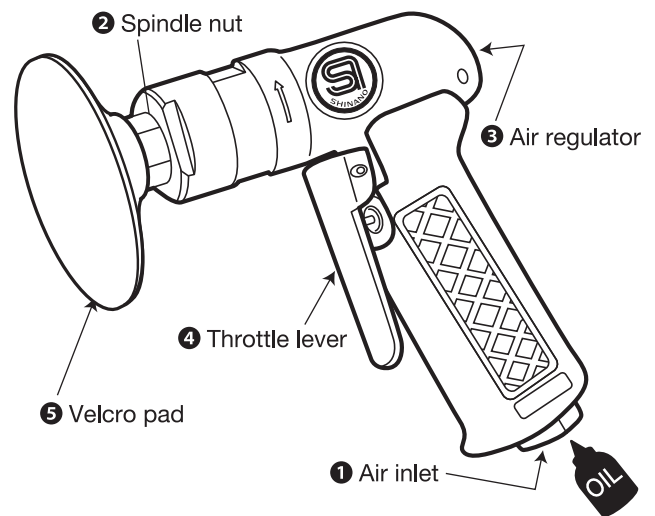

Accessories : 3" Velcro pad thread (1),  
 φ80mm Sponge buff (1), φ80mm Wool buff (1),  
 φ75mm Sandinr paper (1), Spanner wrench (1)

SI-2224S

Max. rpm : 5,000 rpm

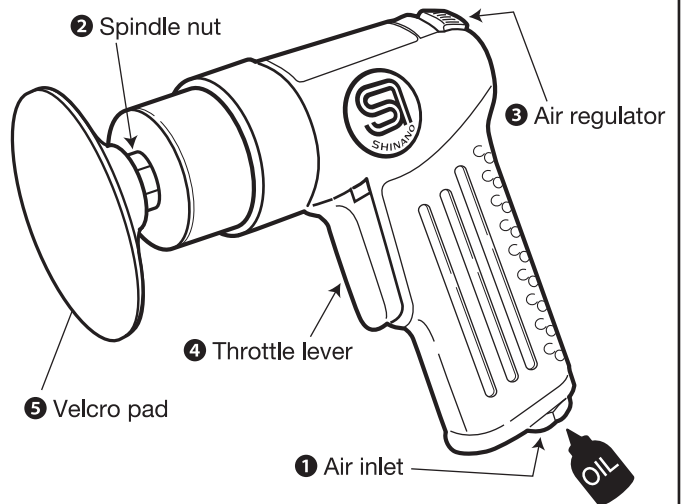

Accessories : 3" Velcro pad thread (1),  
 φ80mm Sponge buff (1), φ80mm Wool buff (1),  
 φ75mm Sandinr paper (1), Spanner wrench (1)

## SI-2221 / SI-2224S

Model Number	Buff Pad Size mm/(in.)	Spindle Size Female	Free Speed rpm	Out Put Watt	Weight kg/(lb)	Noise Level dBA/(power)	Vibration m/s <sup>2</sup>	Avg. Air Consumption CFM
<b>SI-2221</b>	70/(3")	M6×1	4,500	203	0.64/(1.42)	87/(99)	<2.5	2.5
<b>SI-2224S</b>	70/(3")	M6×1	5,000	270	0.60/(1.32)	85.5/(98)	<2.5	2.5

### **WARNING**

- Be sure to remove the air hose for replacement of buff and paper.
- Be sure firmly and securely to mount the pad.
- Never use the grindstone for this tool.
- For mounting the pad, be sure to remove the used service wrench.
- Vibration will occur to some extent. Avoid continuous operation if possible, and take a rest of 10 minutes per an hour.

### **CAUTION**

- If the operation proceeds using a tip or a part of the pad, the pad will be broken or tool balance be loosened, when precious polishing can not be secured. Be careful to handle the pad.
- The air tool is a precious tool. Neither throw nor drop the tool, nor give a strong shock thereto. Such incidents will result in failure.
- Avoid using it for the other purpose than the usage, and do the forcible operation beyond the abilities.
- Avoid long time idling run or unnecessary idling operation, which will encourage to wear, and result in trouble.
- After operations, be sure to prevent dusts from entering at the air inlet.

 **SHINANO INC.**

<http://www.shinanoinc.com>

MADE IN JAPAN